


OCBW型板式双作用平衡阀(开式平衡)

OCBW SERIES FLANGEABLE DUAL
COUNTERBALANCE VALVE
FOR OPEN CENTRE


符号 SYMBOL



钢体阀。A→A1, B→B1通过单向阀自由开启；A1→A, B1→B通过单向阀密闭，由可调先导阀控制开启。连接方式：ISO CETOP3 建议应用于开式平衡控制。

Flangeable dual counterbalance valve. Free flow A towards A1 and B towards B1, perfect seal A1 towards A and B1 towards B through adjustable check valves and operated pilot valve. Flanging: ISO CETOP 3 Recommended for open centre controls.

安装尺寸 Installation Dimensions

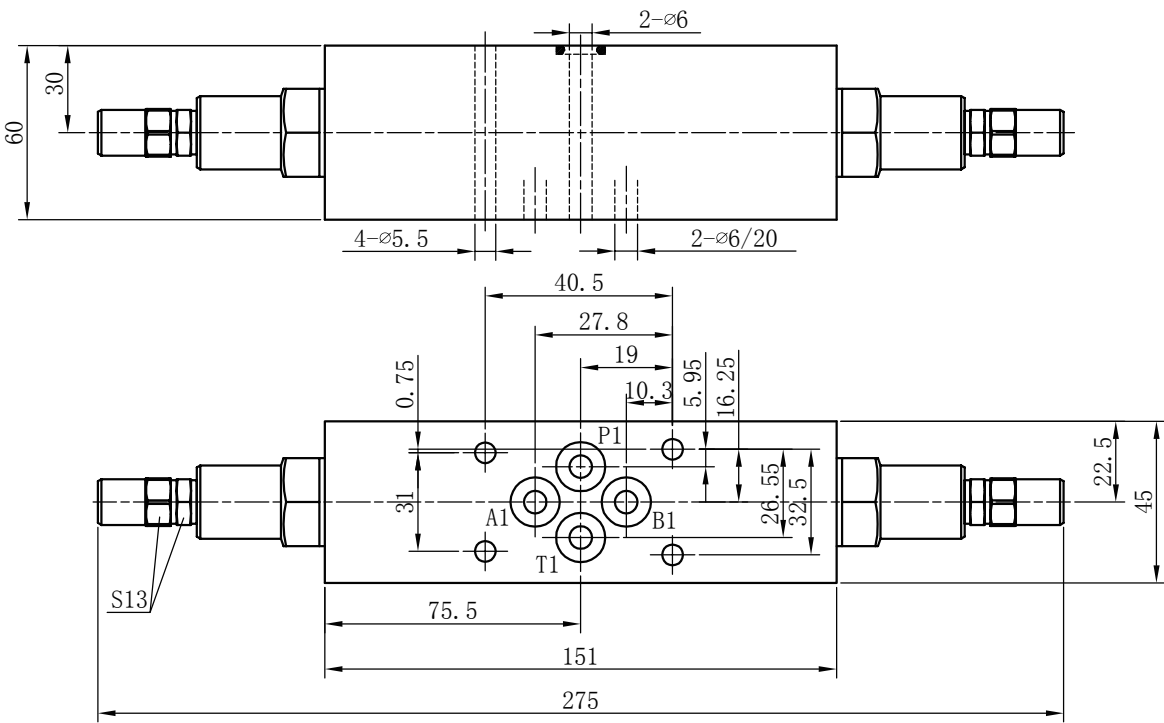

技术参数 Technical data

型号 Model	OCBW-43
先导比例 Pilot Ratio	4.3:1
压力调节范围(MPa) Adjustance Pressure Range (MPa)	10-35
标准设定(MPa) Standard Setting(MPa)	35
流量范围 (l/min) Flow Range (l/min)	5-45
最大压力 (MPa) Max.Peak Pressure (MPa)	35
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面镀镍处理/ (Casting) Surface nickel plated
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15