
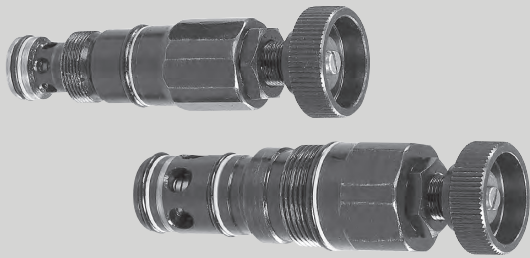


PB...K型插装式先导溢流阀

PB...K SERIES PLUG-IN PILOT CONTROLLED PRESSURE RELIEF VALVES

符号 SYMBOL

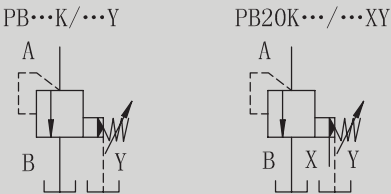

PB型溢流阀是插装式先导溢流阀，用于限制液压系统压力。


PB...K series are pilot operated relief valves used to limit pressure in a hydraulic system.

技术参数 Technical data


通径 Size	6	10	20
工作压力(Mpa) Operating pressure(Mpa)	31.5		
调节压力(Mpa)Set pressure(Mpa)	至5, 10, 20, 31.5/Up to 5, 10, 20, 31, 5		
最大流量(L/min) Max .flow rate(L/min)	60	100	300
介质温度(℃) Fluid temperature(℃)	-20 ~ 70		
过滤精度(μ m) Filtration accuracy(μ m)	25		
重量(千克) Weight(KGS)	0.22	0.3	0.35
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	钢件 表面发黑处理 Steel Body Surface Black Oxide		
油液清洁度/Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15		

安装尺寸 Installation dimensions


PB6K.../...Y

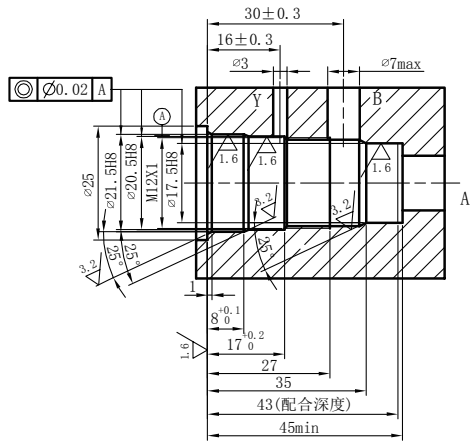


PB10K.../...Y

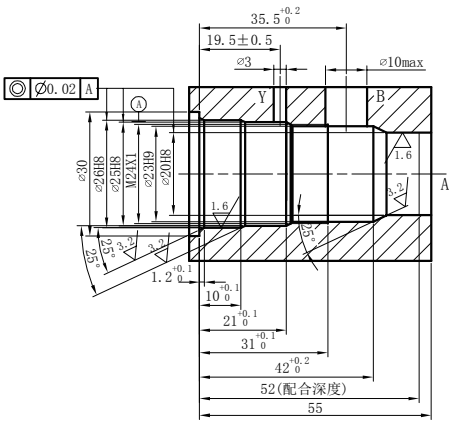

PB20K.../...Y

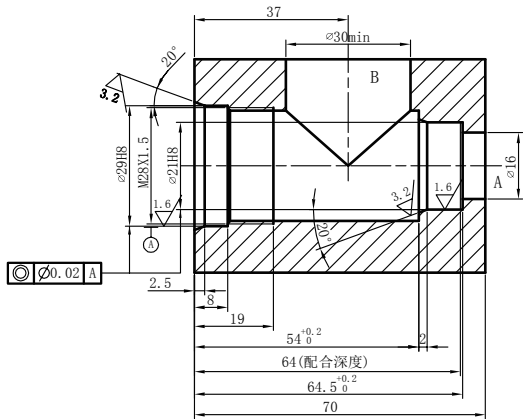

PB20K.../...X Y

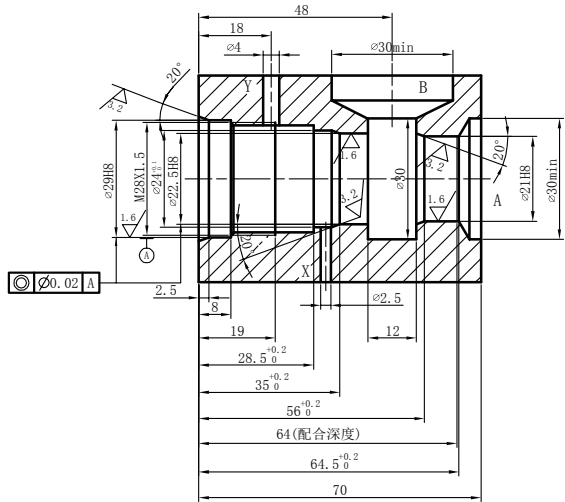

型号 Model	PB	10	K	1	40	100	Y	*	*	For further details 附加说明
通径:6;10;20 Size:6;10;20										
K = 插装式连接 K = Cartridge valve										
1=手柄; 2= 带保护调节螺栓 1=Rotary handle 2=Adjustable screw with protective cap										
40=40系列适用于6, 10; 10=10系列适用于20 40=40series are suitable for 6,10; 10=10series are suitable for 20										
										无=丁晴橡胶 V=氟橡胶 No code=NBR seals V=FPM seals
										Y=先导控制油内供外排 XY=先导控制油外供外排(仅PB20K) Y = Internally pilot, externally drained XY = External pilot, externally drained (Only for PB20K)
										压力等级 Pressure rating 50=5 MPa 100=10 MPa 200=20 MPa 315=31.5 Mpa