


QDE型电磁球阀

QDE SERIES DIRECTIONAL BALL VALVES

符号 SYMBOL

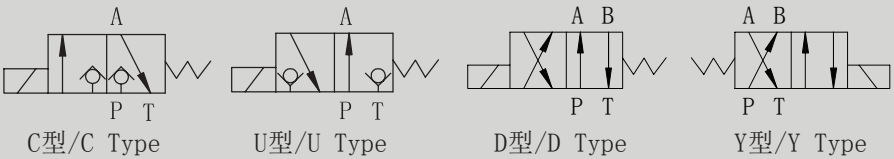



QDE型方向阀是电磁铁操作的钢球式换向阀，用于控制油液的开启、停止和液流的方向。常用于保压回路。

QDE series are solenoid are solenoid operated poppet valves, they are used to control the start ,stop and direction of flow.

技术参数 Technical data

规格 Size	6U	6C	6D	6Y	10U	10C	10D	10Y
额定流量(L/min) Rated flow(L/min)	16	16	12	12	30	24	30	24
工作压力(Mpa) Operating pressure(Mpa)	31.5							
重量(千克) Weight(KGS)	1.2	1.2	1.2	1.2	2.8	2.8	2.8	2.8
阀体（材料）表面处理 Valve body (Material) Surface treatment	钢件 表面发黑处理 Steel Body Surface Black Oxide							
油液清洁度/Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15							

底板连接尺寸 Subplate Installation dimensions

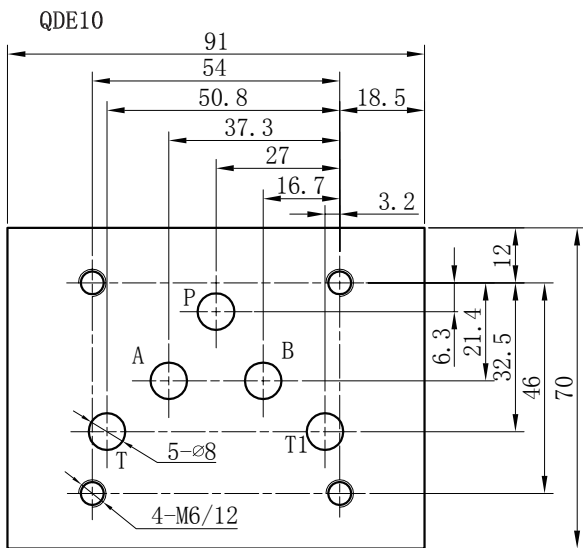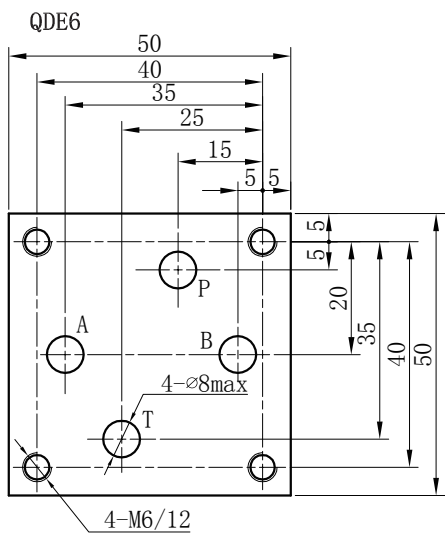

M	3	QDE	6	U	20	315	DC24	N	Z5L	P	B0.8
矿物质液压油 Mineral hydraulic oil											
3=三油口 4=四油口 3=3 actuator ports 4=4 actuator ports											
型号 Model											
通径 6; 10 Size 6; 10											
U=二位三通常开, C=二位三通常闭 D=二位四通; Y=二位四通 U=2/3 way normally open C=2/3 way normally closed D=2/4 way; Y=2/4 way											
系列号 Series number											
工作压力 Operating pressure											
电压 Voltage DC12;DC24 ;AC110;AC220											
N=有故障检查按钮;无=没有故障检查按钮 N=With concealed manual override No Code =Without concealed manual override											

无=不带节流器
B0.8=节流孔径0.8
B10=节流孔径1.0
B12=节流孔径1.2
B14=节流孔径1.4
B15=节流孔径1.5
B18=节流孔径1.8
B20=节流孔径2.0
B22=节流孔径2.2
No code=Without throttle insert
B0.8=Throttle 0.8
B10=Throttle 1.0
B12=Throttle 1.2
B14=Throttle 1.4
B15=Throttle 1.5
B18=Throttle 1.8
B20=Throttle 2.0
B22=Throttle 2.2
无=不带插装单向阀
P=带插装单向阀
No code=Without cartridge check valves
P=With cartridge check valves
Z5L=带灯大方形插头
Z5L=Large quadrate plug with light