


SVK10 多回路选择阀

SVK10 FLOW DIVERTERS


符号 SYMBOL




技术参数 Technical data

型号 Model	SVK10
最大流量 (L/min) Max Flow rate (L/min)	80
最大工作压力 (Mpa) Max operating pressure (MPa)	25
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面磷化处理 / (casting) phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

特性曲线 (在使用 HLP46, 油=40℃±5℃时测得) Characteristic curves (measured with HLP46, Voil=40℃±5℃)

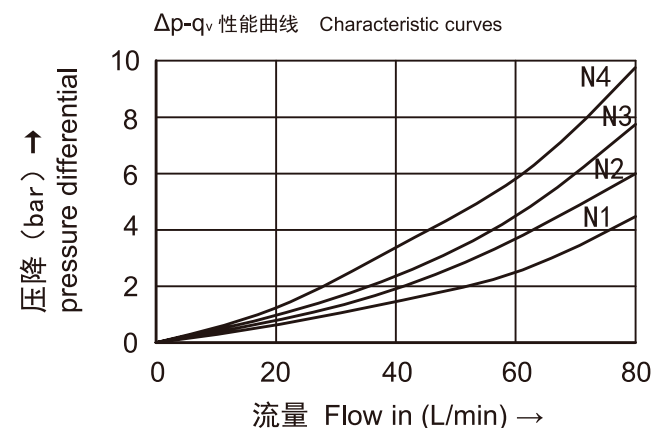

安装尺寸 Installation Dimensions

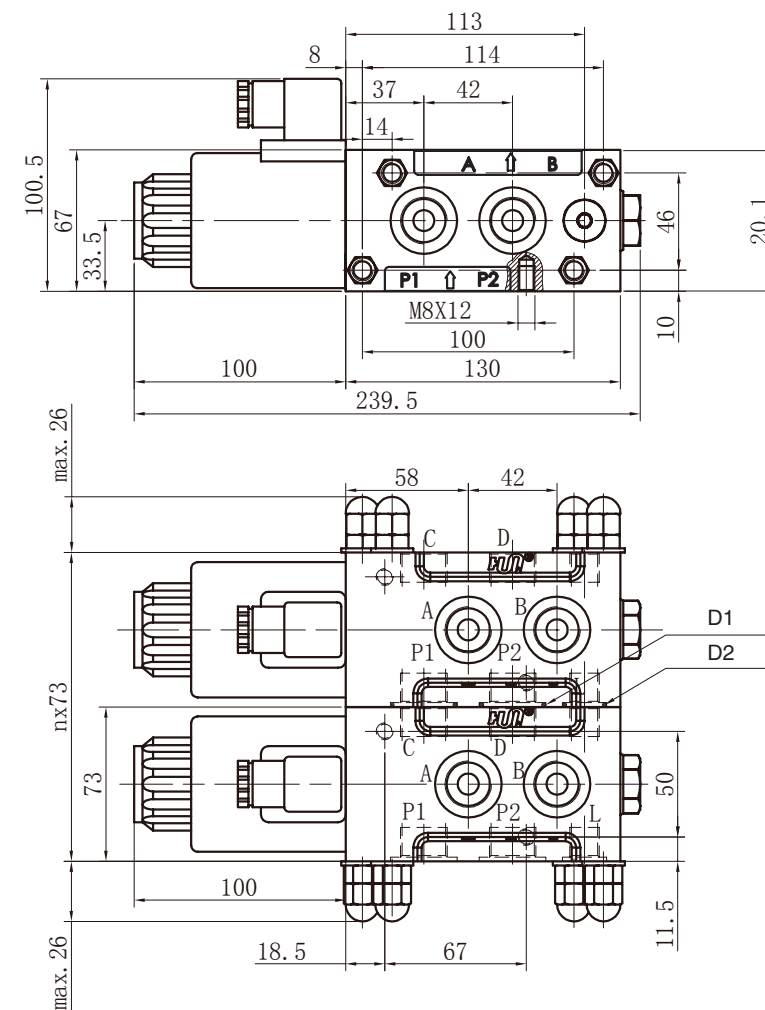

D1.0型圈/D1.0-Ring
 G1/2、M22X1.5=Φ26.5X2.65
 G3/4、M27X2=Φ32X2
 SAE10=Φ29X2.65

D2.0型圈/D2.0-Ring
 G1/2、M22X1.5=Φ17X2
 G3/4、M27X2=Φ17X2
 SAE10=Φ16X1.5

SVK10	*	*	Z5L	*	*
型号 Model					
螺纹连接 Threaded connection G 1/2 G 3/4 SAE 10					
电压 Voltage DC12;DC24					
Z5L=带灯大方形插头 Z5L=Large quadrate plug with light					
					特别要求单独列出 Special requirements to be briefly specified
					叠加的元件的个数 QTY of units N1=1个(one unit) N2=2个(two units) N3=3个(three units) N4=4个(four units)