


ZS-10H



ZS-15HS2

Main Dimensions

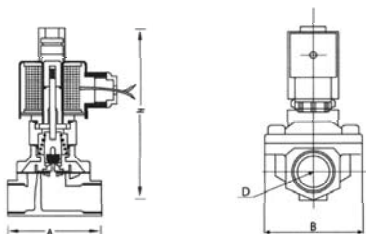

Product Features

- * 2/2 ways Solenoid valve, Normally open. Copper and stainless steel 304 valve selection
- * Multiple seals are available for different medium
- * Wide size range from 3/8" to 2", with both thread and flange connection
- * Diaphragm pilot solenoid valve, with lower working pressure
- * To reduce the power consumption of 80% energy-saving

Port size	Orifice (mm)	CV value	Pressure difference (Bar)								The maximum temperature of fluid (°C)	ZSH			ZSH-N		Model 220VAC 50/60Hz		Main dimension Length x Width x Height
			Min. pressure	Max. working pressure								VA AC220	W DC24V	W DC24V	Brass	Stainless steel 304			
				Air	Gas	Water/Hot water/Liquid		Light oil=2CST											
						AC	DC	AC	DC	AC							DC		
3/8"	4.0	0.6	0	5	3	5	3	3	3	80	33	20	4	ZS10H-040E2	ZS10H-040E2S2	52.5 x 32.5 x 115			
	4.0	0.6	0	5	3	5	3	3	3	120	33	20	4	ZS10H-040E2E	ZS10H-040E2SE	52.5 x 32.5 x 115			
	4.0	0.6	0	5	3	5	3	3	3	120	33	20	4	ZS10H-040E2V	ZS10H-040E2SV	52.5 x 32.5 x 115			
	16	4.8	0	5	3	3	5	3	3	80	33	20	4	ZS10H-160E2	ZS10H-160E2S2	69 x 57 x 135			
1/2"	16	4.8	0	5	3	3	5	3	3	120	33	20	4	ZS10H-160E2E	ZS10H-160E2SE	69 x 57 x 135			
	16	4.8	0	5	3	3	5	3	3	120	33	20	4	ZS10H-160E2V	ZS10H-160E2SV	69 x 57 x 135			
	16	4.8	0	5	3	5	3	3	3	80	33	20	4	ZS15H-160E2	ZS15H-160E2S2	69 x 57 x 135			
	16	4.8	0	5	3	5	3	3	3	120	33	20	4	ZS15H-160E2E	ZS15H-160E2SE	69 x 57 x 135			
3/4"	20	7.6	0	5	3	5	3	3	3	80	33	20	4	ZS15H-160E2V	ZS15H-160E2SV	69 x 57 x 135			
	20	7.6	0	5	3	5	3	3	3	80	33	20	4	ZS20H2E2	ZS20H2E2S2	73 x 57 x 142			
	20	7.6	0	5	3	5	3	3	3	120	33	20	4	ZS20H2E2E	ZS20H2E2SE	73 x 57 x 142			
	20	7.6	0	5	3	5	3	3	3	120	33	20	4	ZS20H2V	ZS20H2V2S2	73 x 57 x 142			
1"	25	12	0	5	3	5	3	3	3	80	33	20	4	ZS25H2E2	ZS25H2E2S2	99 x 77.5 x 150			
	25	12	0	5	3	5	3	3	3	120	33	20	4	ZS25H2E2E	ZS25H2E2SE	99 x 77.5 x 150			
	25	12	0	5	3	5	3	3	3	120	33	20	4	ZS25H2V	ZS25H2V2S2	99 x 77.5 x 150			
	32	24	0	5	3	5	3	3	3	80	70	55	-	ZS32H2E2	ZS32H2E2S2	112 x 86.5 x 180			
1-1/4"	32	24	0	5	3	5	3	3	3	120	70	55	-	ZS32H2E2E	ZS32H2E2SE	112 x 86.5 x 180			
	32	24	0	5	3	5	3	3	3	120	70	55	-	ZS32H2V	ZS32H2V2S2	112 x 86.5 x 180			
	40	29	0	5	3	5	3	3	3	80	70	55	-	ZS40H2E2	ZS40H2E2S2	123 x 94 x 190			
	40	29	0	5	3	5	3	3	3	120	70	55	-	ZS40H2E2E	ZS40H2E2SE	123 x 94 x 190			
2"	40	29	0	5	3	5	3	3	3	120	70	55	-	ZS40H2V	ZS40H2V2S2	123 x 94 x 190			
	50	48	0	5	3	5	3	3	3	80	70	55	-	ZS50H2E2	ZS50H2E2S2	168 x 123 x 216			
	50	48	0	5	3	5	3	3	3	120	70	55	-	ZS50H2E2E	ZS50H2E2SE	168 x 123 x 216			
	50	48	0	5	3	5	3	3	3	120	70	55	-	ZS50H2V	ZS50H2V2S2	168 x 123 x 216			
Flange 4 hole	25	12	0	5	3	5	3	3	3	80	57	32	6	-	ZSF25H2E2S2	140 x 115 x 180			
	25	12	0	5	3	5	3	3	3	120	57	32	6	-	ZSF25H2E2SV	140 x 115 x 180			
	25	12	0	5	3	5	3	3	3	120	57	32	6	-	ZSF25H2E2V	140 x 115 x 180			
	32	24	0	5	3	5	3	3	3	80	70	55	-	-	ZSF32H2E2S2	152 x 135 x 235			
	32	24	0	5	3	5	3	3	3	120	70	55	-	-	ZSF32H2E2SV	152 x 135 x 235			
	32	24	0	5	3	5	3	3	3	120	70	55	-	-	ZSF32H2E2V	152 x 135 x 235			
	40	29	0	5	3	5	3	3	3	80	70	55	-	-	ZSF40H2E2S2	152 x 145 x 240			
	40	29	0	5	3	5	3	3	3	120	70	55	-	-	ZSF40H2E2SV	152 x 145 x 240			
	40	29	0	5	3	5	3	3	3	120	70	55	-	-	ZSF40H2E2V	152 x 145 x 240			
	50	48	0	5	3	5	3	3	3	80	55	-	-	-	ZSF50H2E2S2	195 x 160 x 255			
	50	48	0	5	3	5	3	3	3	120	70	55	-	-	ZSF50H2E2SV	195 x 160 x 255			
	50	48	0	5	3	5	3	3	3	120	70	55	-	-	ZSF50H2E2V	195 x 160 x 255			